

Design and Application of Novel Morphological Filter used in Vehicle Detection

Munkhjargal Gochoo, Damdinsuren Bayanduuren,
Uyanga Khuchit, Galbadrah Battur
School of Information and Communications Technology,
Mongolian University of Science and Technology
Ulaanbaatar, Mongolia
g.munkhjargal@must.edu.mn
damdinsurenb@must.edu.mn
uyangaakh@must.edu.mn
b.galbadrah12@gmail.com

Sy-Yen Kuo
Dept. of Electrical Engineering,
National Taiwan University,
Taipei, Taiwan (ROC)
sykuo@ntu.edu.tw

Tan-Hsu Tan
Dept. of Electrical Engineering
National Taipei University of Technology
Taipei, Taiwan (ROC)
thtan@ntut.edu.tw

Shih-Chia Huang
Dept. of Electronic
National Taipei University of Technology
Taipei, Taiwan (ROC)
schuang@ntut.edu.tw

Abstract—In this paper we represent our proposed novel morphological filter developed under the scope of Taiwan-Mongolian co-project. We applied the implemented filter in vehicle detection from CCTV video signal. Our goal was to develop a filter that can reduce the noise in background subtracted binary image, which created by camera shake, and unnecessary moving objects such as wave of the tree etc. We compared our filter performance with morphological open, close, erosion, dilation, and median filters. PSNR (Peak Signal to Noise Ratio) is employed for evaluating the performance of the filters, our filter's PSNR was relatively higher (21.39) than the other method. Furthermore, we used our filter for vehicle detection, and detection rate was 100% as the other methods. Thus, we conclude the new filter is sufficient for denoising binary image, and suitable for vehicle detection.

Keywords—new method; image processing; digital filter; algorithm; vehicle detection

I. INTRODUCTION

Computer vision has always been widely accepted in application to extract information from video source. However, removing noises in a frame of the video was a difficult task, and a lot of filtering algorithms were developed in last decades. Mathematical morphology has been used as a powerful tool for filtering noises, while preserving the important geometrical features. Furthermore, morphological methods use structuring elements (SE) such as rectangle, ellipse and cross [1, 2], and size of the SE can be adjusted to get better results.

The SE of the morphological filter is similar to the window or mask function. In actual applications, there is quite a difference of morphological features among the vibration signals because of operating environment and processing parameters of the mechanical equipment [3]. At present, morphological opening, morphological closing and their

combinations (open and close) are widely used in image processing. Also omnidirectional methods of morphology were introduced. Moreover it is said that close-opening and open-closing filter [4]-[7].

Median filters and order-statistic filters are a class of nonlinear and translation-invariant discrete filters that have become popular in digital speech and image processing, and also in statistical or economic time series analysis. These filters are easy to implement and can suppress impulse noises, which blur edges [8]-[10]. Furthermore median blur method blurs the frame according to the kernel size which is deficient for proper usage.

We found out that aforementioned filters could not remove noise from binary image as we desired. Thus, we intended to develop a better filter that could remove more noise while keeping the geometrical structure of the moving vehicles.

II. METHOD

The main difference between our method and morphological filter is we calculate the surrounding pixels of a suspicious pixel, however morphological methods check the pixels in structuring element. In binary morphology, the dilation (1) and erosion (2) are respectively defined as below [11]:

$$(G \oplus B)(x, y) = \max\{G(x - i, y - i) + B(i, j) | (i, j) \in D_B\} \quad (1)$$

$$(G \ominus B)(x, y) = \min\{G(x - i, y - j) - B(i, j) | (i, j) \in D_B\} \quad (2)$$

where \oplus , and \ominus denotes, respectively, dilation operator and erosion operator, $G(x, y)$ is binary image, and $B(x, y)$ is structure element.

Opening (3) and closing (4) operation of binary image are defined as [11]:

$$G \circ B = (G \ominus B) \oplus B \quad (3)$$

$$G \bullet B = (G \oplus B) \ominus B \quad (4)$$

where \circ , and \bullet denotes, respectively, opening operator and closing operator.

The filter window can be 2D square, rectangle, cross, and ellipse in default morphological filters, but in our case, we used a square window. Window size can be resizable to improve the result of the filter. Our method is similar to the filters in a way that it treats the pixels one by one to decide whether it's noise or not. Following is a pseudocode of our method.

A. Algorithm's pseudo code

1. Run till the end of frame
 - 1.1. if $x(1,1)=1$, suspicious pixel is white
 - 1.1.1. Calculate S , number of white pixels inside the window
 - 1.1.2. if $S < n^2/2$, number of white pixels is less than a half of total pixels inside the window
 - 1.1.2.1. set $x(1,1)=0$
 - 1.1.3. end if
 - 1.2. end if
2. end frame

We assume the window as a 2-D square matrix size of $n \times n$. We also assumed binary image's white pixel has a value of 1, and black pixel has a value of 0. Our suspicious pixel $x(1,1)$ is at 1st row and 1st column of the window. This window will slide from top left corner to the bottom right corner checking all the frame pixels. If the white pixel occurs while searching, we calculate the S which is the total number of white pixels inside the window, at the moment. If $S < n^2$, S is less than a half of the number of all pixels inside the window, the algorithm decides the suspicious pixel is a noise, then the algorithm changes the suspicious pixel to a black pixel. On the other hand, if $S > n^2$, S is greater than a half of the number of all pixels, we leave the suspicious pixel as it is assuming the pixel was a part of a vehicle. Equation of S , and suspicious pixel $x(1,1)$ are defined as below:

$$S = \sum_{i,j}^{i+n} x(i,j) \quad (5)$$

$$x(1,1) = \begin{cases} 1, & S > \frac{n^2}{2} \\ 0, & \text{otherwise} \end{cases} \quad (6)$$

where, S is a number of white pixels in the window, $x(i,j)$ is a pixel, at row i and column j , inside the window, n is a size of the window.

III. EXPERIMENTS AND RESULTS

We tested the new method in video which is provided by Traffic Control Center of Ulaanbaatar, the video was recorded in Nov. 2015. A sample frame from the video is shown in Fig. 1, size of the frame was 622×441 , and format was png. We did background subtraction to separate the moving objects from stationary background (Fig. 2). We intentionally chose this frame due to its high noise presence in order to show the quality of the new filter. We also added Gaussian noise (Fig. 3). Control image (Fig. 3) was created manually by removing all the noise from Fig. 2. We intended to get the best result which is as close as the control image. The result of the new method is shown in Fig. 5. Results of morphological open, close, and median filters are shown in, respectively, Fig. 6, 7, 8. All these results were the best results that we manually chose from many different cases.

We employed *PSNR* (Peak Signal to Noise Ratio) for comparisons of filter quality. In order to calculate *PSNR*, first we found *MSE* (Mean Squared Error). The definition of the *MSE* is shown below:

$$MSE = \frac{1}{MN} \sum_{i=1}^M \sum_{j=1}^N (Y_{i,j} - S_{i,j})^2 \quad (7)$$

where, M , N are size of the frame, Y and S are frames to be compared, i and j are the coordinates of the pixel.

PSNR is defined as:

$$PSNR = 10 \log_{10} \left(\frac{255^2}{MSE} \right) dB \quad (6)$$



Fig. 1. Original image from the video.



Fig. 2. Image after background subtraction.

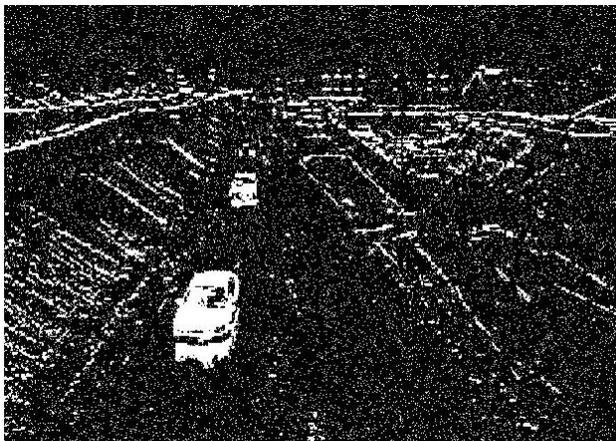


Fig. 3. Gaussian noise added on Fig. 2.



Fig. 4. The control image, noises were manually removed from Fig. 2.



Fig. 5. Filtered result of Figure 3 by the new method, window size is 8x8.



Fig. 6. Filtered result of Figure 3 by morphological open, ellipse type, size is 2x2.



Fig. 7. Filtered result of Figure 3 by morphological close, ellipse type, size is 2x2.



Fig. 8. Filtered result of Figure 3 by median filter.

PSNR values of all methods are shown in Fig. 9, results of morphological erosion and dilation methods are included even though their filtered images are not present in the paper. Among the results, *PSNR* of the new method was 21.39, which is the highest one among the others, meaning closest to the control image. Second best method was morphological erosion, and the worst method was morphological dilation.

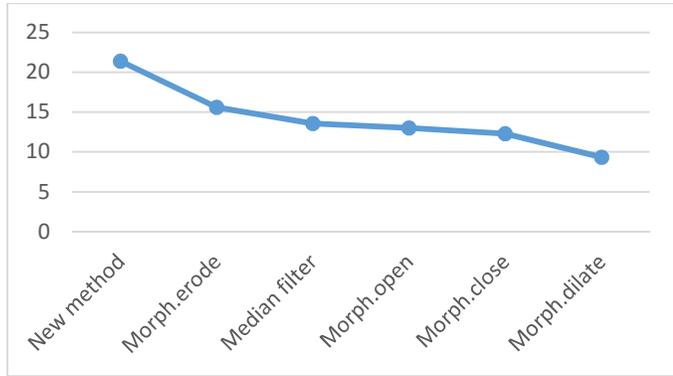


Fig. 9. Comparison between PSNRs.

Histogram of the white and black pixels of all methods are represented in Table 1. We can see the new method removed more amount of white pixels among the others. However, removing excessive white pixels is not good when those white pixels were part of vehicle, in our case, we can easily recognize the vehicles from the filtered image with naked-eyes. Besides, automatic vehicle detection, using blob detection method, rate was 100% when our filter was used.

TABLE I. COMPARISON BETWEEN WHITE AND BLACK PIXELS HISTOGRAM

	Number of white pixels	Number of black pixels	Sum of the pixels
Image Threshold	17525	256777	274302
Control Image	4474	269828	274302
Noised Image Threshold	39398	234904	274302
New method	5587	268715	274302

Morph. dilate	111333	162969	274302
Morph. erode	7798	266504	274302
Morph. open	16199	258103	274302
Morph. close	45690	228612	274302
Median filter	20681	253621	274302

Calculation costs of the methods are shown in Table 2. In this experiment, we used laptop with Intel Core i7 processor 2.4GHz (8CPUs), 8GB of RAM, Windows 10 OS, and the window size was 8x8 so the calculation cost of our function was more than other methods. However the calculation cost could be decreased by 2-4 times after improvement of the algorithm.

TABLE II. CALCULATION COSTS OF THE METHODS

Function	microsecond
New method	6560
Morph. dilate	363
Morph. erode	336
Morph. open	1293
Morph. close	739
Median filter	393

IV. CONCLUSION

New morphological filter is developed, and evaluation experiments are performed in this study. According to the experiment results, *PSNR* of the new filter was relatively higher than the other filters. Furthermore, vehicle detection rate was 100% as the other filters provided when the new filter is employed. Thus we conclude our filter is suitable for denoising binary image and for vehicle detection application. In the future, we will improve the algorithm so the calculation cost could be decreased by 3-4 times.

V. ACKNOWLEDGMENT

The authors would like to thank National Science Council of the Republic of China, Taiwan, and Ministry of Education, Culture and Sciences, Mongolia for financially supporting this research under grants 103WFA015042.

VI. REFERENCES

- [1] Yang lirui, Ding Runtao "Morphological filters with multiple structuring element." China 1991 international conference on circuits and Systems, June 1991, Shenzhen China
- [2] Che Hong, Sun Longhe "The optimized design and application of circular morphological filter" 2009 DOI 10.1109/GCIS.2009.119 pp. 257-261
- [3] Lijun Zhang, Lixin Zhang, Jianhong Yang, Min Li "Adaptive morphological filter to fault diagnosis of gearbox" National natural science foundation of China no. 51005015, 51004013, 50905013 pp. 70-73
- [4] F. Cheng and A. N. Venetsanopoulos "An Adaptive Morphological Filter for Image Processing" IEEE Transactions on image processing vol. 1 no. 4 October 1992 pp. 533-539
- [5] Wang Xiuli, Nan YiMin "A morphology filter to impulse noise based on adaptive optimizing the values of structure element" Advanced computer theory and engineering, August 2010, vol. 5

- [6] Zhang Xiang-guang LIU Yun Wang Chuan-xu "Filter design based on the theory of the generalized morphological filter with omnidirectional structuring element " Eight ACIS international conference on software engineering, artificial intelligence, networking, and parallel distributed computing pp. 255-258, 2007
- [7] Petros Maragos, Ronald W. Schafer "Morphological filters-part II: their relation to median, order-statistic, and stack filters" IEEE transactions on acoustic, speech, and signal processing, vol. assp-35, no. 8, August 1987
- [8] Kenneth R. Castleman "Digital image processing" NJ: Prentice-hall 1996
- [9] Ji Zhen "A novel mathematical morphology filter and its performance analysis in noise reduction" Chinese journal of electronics, 2005 pp.68-72.
- [10] Windyga P S. "Fast impulsive noise removal" IEEE trans, image processing, 2001 pp. 173-179
- [11] Quiling Wang, Lixin Wu, Zhihua Xu, Hong Tang, Ran Wang, Fashuai Li "A progressive morphological filter for point cloud extracted from UAV images" IGARSS 2014 pp. 2023-2026